




FEATURES


- 1 μ Hz ~ 20 or 30MHz, 20Vpp, 1 or 2 Channel (s)
- Arbitrary Waveform 250MSa/s, 16-bit Resolution, 8M Memory Depth
- Isolation Channel Circuit Design
- Synchronized Phase Operates up to 6 Units and 12 Channels
- Harmonic Signal Generator
- Dual Channel Models Support SUM Modulation, Coupling, Tracking, and Phase Functions
- Pulse Waveform Parameters Can be Set Independently
- Built-in AM/FM/PM/FSK/PWM/SUM Modulation, Sweep and Burst Functions
- Built-in Medical and Automotive Electronic Waveforms
- Built-in I/Q baseband Waveform on AFG-3032/3022
- Provide USB/LAN/GPIB (Optional) Instrument Control Interface

PANEL INTRODUCTION

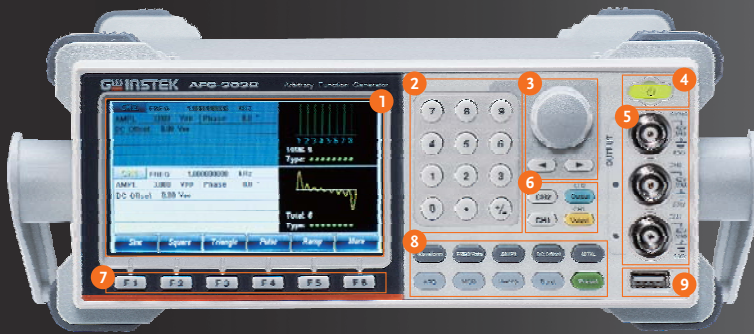

AFG-3032/3022

1. TFT LCD Panel
2. Number Panel
3. Scroll Knob & Selection Key
4. Power Switch
5. Output Terminals
6. Main Output Switch
7. Function Keys
8. Operation Keys
9. USB Host
10. Trigger & Modulation Input
11. 10MHz REF Input & Output
12. Fan
13. GPIB
14. LAN
15. USB Device

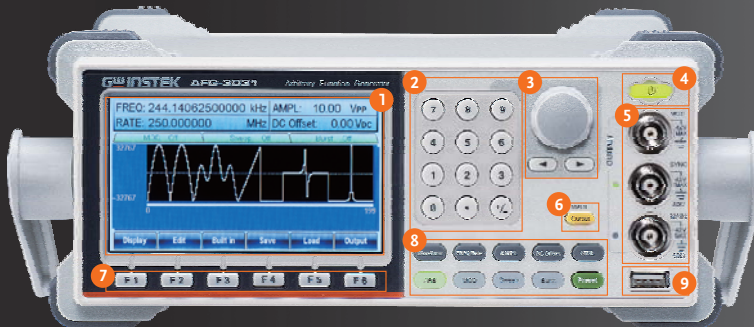

AFG-3031/3021

1. TFT LCD Panel
2. Number Panel
3. Scroll Knob & Selection Key
4. Power Switch
5. Output Terminals
6. Main Output Switch
7. Function Keys
8. Operation Keys
9. USB Host
10. Trigger & Modulation Input
11. 10MHz REF Input & Output
12. Fan
13. GPIB
14. LAN
15. USB Device



The AFG-3000 Series Comes With Four Models. Model Number and Channel (s) are Listed as Follows:

| MODEL | AFG-3031 | AFG-3032 | AFG-3021 | AFG-3022 |
|-----------------|---------------------|---------------------|---------------------|---------------------|
| MAIN FUNCTION | | | | |
| Frequency Range | 1 μ Hz ~ 30 MHz | 1 μ Hz ~ 30 MHz | 1 μ Hz ~ 20 MHz | 1 μ Hz ~ 20 MHz |
| Channel | 1 | 2 | 1 | 2 |

GW Instek AFG-3000 Series arbitrary function generators include 20MHz/30MHz single isolated channel and 20MHz/30MHz dual isolated channel models, designed to meet industry, scientific research, and education applications. Not only output channel is earth ground isolation, dual channel models are also independently earth ground isolation, which is suitable for floating circuits (up to $\pm 42V$). Without taking grounding reference into consideration, each channel of dual channel models can be operated independently and multi ARB units can output simultaneously. Applications are, for instance, the ignition control or transmission device of automotive electronics. The series features sample rate of 250MSa/s, 16-bit resolution, and 8M point memory depth arbitrary waveform characteristics. Users can rebuild maximum 8M memory depth waveforms through using a GW Instek digital storage oscilloscope with the built-in DSOLink function of the AFG-3000 Series.

The series supports synchronized phase for multi channel operation and the maximum phase synchronization operation is up to 6 units and 12 channels. 10 MHz atomic clock frequency standard can be input via external signal source to elevate precision for frequency output. The series supports frequency sweep and amplitude sweep that can also integrate functions, including linear/logarithm, one-way (saw tooth)/two-way (triangle) waveforms, continuous/single trigger/gated trigger to meet various application requirements by applying different sweep methods. Frequency sweep tests the frequency response of electronic components such as filter and low frequency amplifier. Amplitude sweep simulates vibration tests (requires a vibration tester), and it also conducts aging tests of various materials and linearity tests of low frequency amplifier.


The main features of the AFG-3000 Series include output amplitude from 1mVpp to 10Vpp (connected with a 50 ohm load); frequency range from 1uHz to 20MHz or 30MHz; 1uHz frequency resolution; and built-in sine, square, pulse, triangle, ramp, DC voltage, harmonic and noise. The waveform width, rise edge time and fall edge time of pulse waveform can be adjusted flexibly. Pulse waveform, with duty cycle from 0.017% to 99.983%, can be applied as trigger signals. Users can conduct arbitrary editing via 65 built-in function waveforms. The series supports AM/FM/PM/FSK/PWM modulation, frequency sweep, amplitude sweep and burst to satisfy industrial application requirements. Dual channel models provide SUM modulation, coupling, tracking, and phase to meet the test requirements of differential signal, phase control and amplifier distortion. Built-in 8th harmonic signal generator simulates harmonic signal of switching power supplies and it also tests EMI power filter characteristics. The AFG-3000 Series provides free arbitrary waveform editing software (AWES) for users to quickly edit waveforms from the built-in diagrams so as to execute measurements.

A. CIRCUIT DESIGN FOR GROUND ISOLATION AMONG OUTPUT/INPUT TERMINAL, INSTRUMENT CHASSIS, AND DUAL CHANNELS




Channel 1, channel 2, reference 10 MHz input, synchronization and modulation input/output connector grounding are isolated from instrument chassis. The output channels of dual channel models are independently isolated. These connectors can sustain maximum isolation voltage up to $\pm 42V_{pk}$ (DC+ AC peak value) to earth ground that is ideal for floating circuit tests. Multi units output can be achieved without factoring in grounding reference issue. Applications include ignition controller or transmission devices of automotive electronics. The built-in DC bias voltage of the AFG-3000 Series can be applied on various waveforms. The DC bias voltage is $\pm 5V$ under 50 Ω load. For automotive electronic applications require higher DC bias voltage such as ignition controller or transmission devices, the external power supplies can be used to bring up the DC bias voltage to $\pm 42V_{pk}$ (DC+ AC peak value).

B. MULTI CHANNEL SYNCHRONIZED PHASE OPERATION

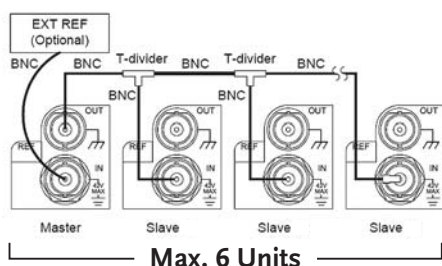

Method one uses reference frequency output (REF OUT) and reference frequency input (REF IN), 50 ohm BNC cable (RG-58A/U) and T type BNC connector to connect up to 6 units to conduct synchronized phase operation.


Users can implement multi channel synchronized phase operation up to 6 units and 12 channels (AFG-3032/3022). There are two methods to execute synchronized phase applications. Under different frequency, master unit can synchronize each channel and modulate individual phase.

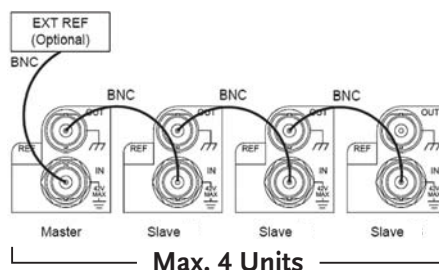

Method two uses reference frequency output (REF OUT) and reference frequency input (REF IN), 50 ohm BNC cable (RG-58A/U) to connect up to 4 units to conduct synchronized phase operation.

At 10 MHz reference frequency input (REF IN) connector, users can input 10 MHz atomic clock frequency standard via external signal source to enhance precision for frequency output.

C. HARMONIC SIGNAL GENERATOR

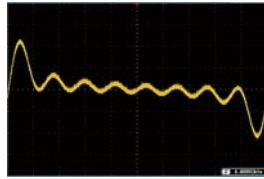


Harmonic Signal Generator

Harmonic Signal

Harmonic signal generator simulates the harmonic signal of switching power supplies and conducts characteristics tests on EMI power filter. Users can set order number and phase for harmonic signals to obtain desired signals. The following diagrams show 8th harmonic signal.

D. PULSE GENERATOR




Pulse Generator


Pulse Signal

The output frequency for pulse reaches 25 MHz and its duty cycle is from 0.017% to 99.983%. Users can set pulse width, duty cycle, rise edge time, fall edge time and edge time to support trigger signal. The following diagrams show settings for pulse signal.


E. VERSATILE OUTPUT WAVEFORM SELECTIONS

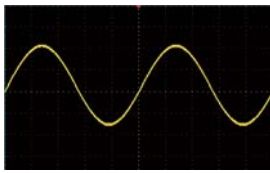


Sine

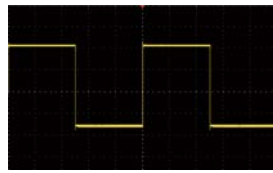


Square

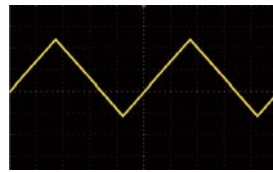

Triangle

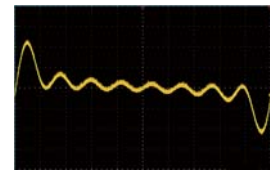


Harmonic

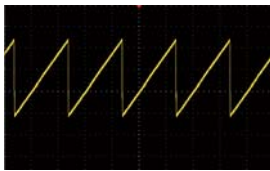

Ramp



Pulse

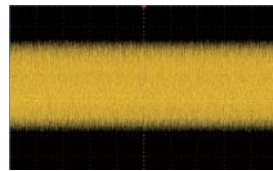


Noise




DC Voltage


MEDICAL APPLICATION WAVEFORMS

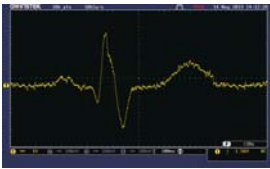


ECG1

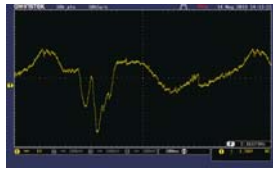

ECG2

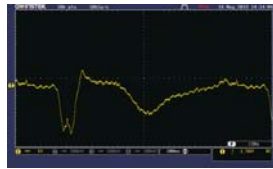


ECG3

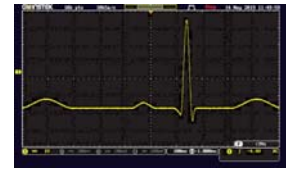


Cardiac.


AUTOMOTIVE ELECTRONIC WAVEFORMS

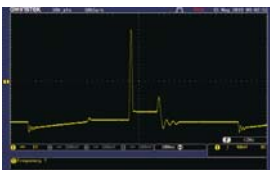


Ignition

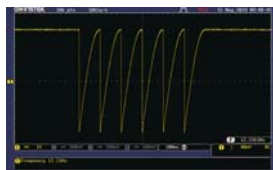

ISO7637-2 TP3A

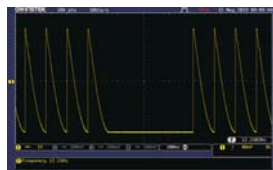

ISO7637-2 TP3B

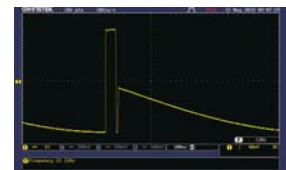


ISO7637-2 TP2B


101 built-in function waveforms include engineering applications, medical electronics, automotive electronic waveforms mathematics, and standard waveforms such as sine, square,

triangle, ramp, pulse, noise, harmonic, and DC voltage that allow users to easily select desired waveforms. Users can select and edit 101 function waveforms from the arbitrary function.

F. IQ BASEBAND WAVEFORM OUTPUT FUNCTION FOR AFG-3032/3022

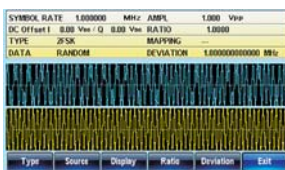


FSK

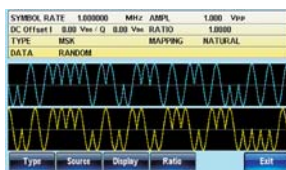

MSK



PSK

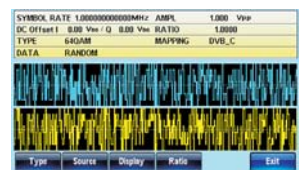


QAM


The CH1 and CH2 of AFG-3032/22 provide the IQ baseband waveform outputs, which include ASK, MSK, FSK(2FSK, 4FSK, 8FSK), PSK(BPSK,QPSK,DQPSK,QQPSK,pi/4 QPSK,pi/4DQPSK,

8PSK), APSK(16APSK, 32APSK), QAM(16QAM, 32QAM, 64QAM), etc. New IQ waveform commands are also available in the user manual.


G. MODULATION FUNCTION

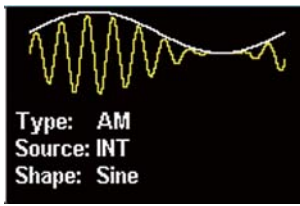


Amplitude Modulation

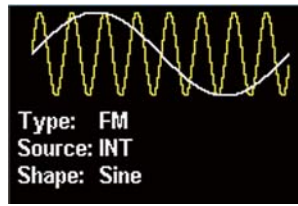


Frequency Modulation

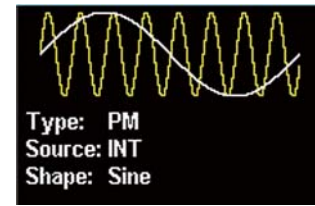


Phase Modulation

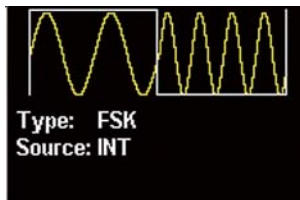

Frequency-shift Keying Modulation

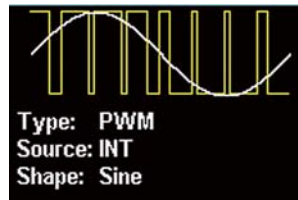

Pulse Width Modulation

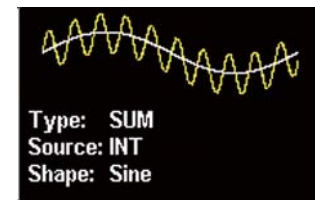

Sum Modulation


The series supports AM, FM, PM, FSK, PWM and SUM modulation. Modulation source can be from inside or outside.

Applications include the baseband of communications systems, motor control and light adjustment, etc.

H. SWEEP FUNCTION




Amplitude Sweep Setting

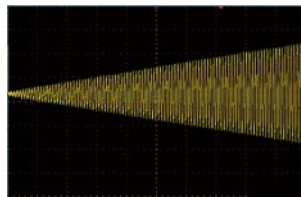

Amplitude Sweep Signal



Frequency Sweep Setting

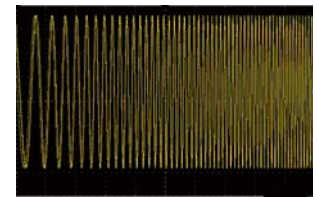

Frequency Sweep Signal

The series supports frequency sweep and amplitude sweep that can also integrate functions, including linear/logarithm, one-way (saw tooth)/two-way (triangle) waveforms, continuous/single trigger/gated trigger to meet various application requirements by different sweep methods. Frequency sweep carries out tests

on the frequency response of electronic components such as filter and low frequency amplifier. Amplitude sweep simulates vibration tests (requires a vibration tester), and it also conducts aging tests of various materials and linearity tests of low frequency amplifier.

I. BURST FUNCTION



Burst Setting




Burst Signal

The series supports N-period or gated trigger. Phase angle, duration time, frequency, waveform infinite can be adjusted to meet non-continuous output applications.

J. FLEXIBLE ARBITRARY WAVEFORM EDITING

Four methods to obtain arbitrary waveforms

- Front Panel Operation

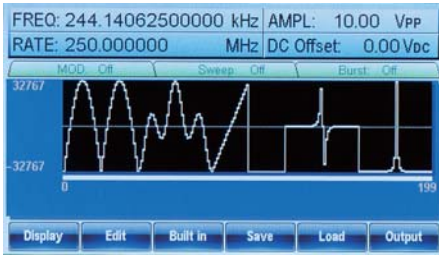

Via single unit's panel, arbitrary waveforms can be selected, edited, stored, recalled, output, triggered from 65 built-in waveforms.

- Direct Waveform Reconstruction (DWR)



Direct Waveform Reconstruction from the DSO

Collocate with GDS series digital oscilloscopes to retrieve waveforms and upload them to arbitrary generator to achieve direct waveform reconstruction.

- CSV file Upload

| | A | B | C |
|---|--------------|---|----------|
| 1 | Start: | | 0 |
| 2 | Length: | | 629 |
| 3 | Sample Rate: | | 20000000 |
| 4 | | | 0 |
| 5 | | | 328 |
| 6 | | | 655 |
| 7 | | | 983 |
| 8 | | | 1310 |

```


% sine wave generation program
result=round(2^16*sin(0.01:2*pi));
save gensin csv result /ascii;
% end

Start: 0
Length: 629
Sample Rate: 20000000
0
328
655
983
1310
1638
    
```

Supports CSV file

Support CSV file upload produced by MATLAB and Excel.

- Arbitrary Waveform Editing PC Software

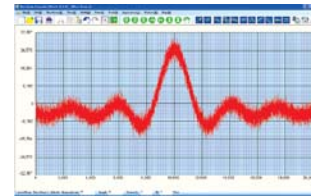


A Sinc Waveform with Gaussian Noise




Digital Signal

Use AWES to edit complex waveforms. The software supports waveform mathematical operation. The waveform series includes Uniform Noise, Gaussian Noise, Rayleigh Noise, various digital codes such as non zero code, Manchester and RS-232, etc.


K. CORRELATED FUNCTIONS OF DUAL CHANNEL OUTPUTS

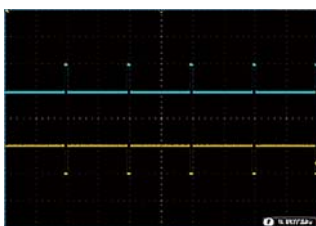

Differential Signal

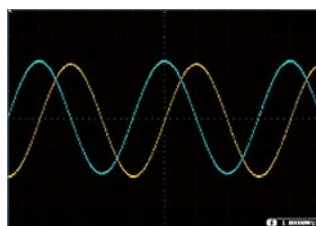

Sine and Cosine Signal

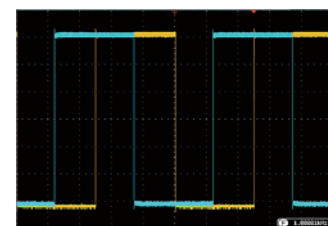

Square Signal Phase Adjustment

AFG-3032/3022 models support independent channel or correlated channel applications. Four correlated functions are provided including SUM modulation, coupling, tracking, and phase.

- * SUM modulation combines two signals and outputs the signal via one single channel. Combining noise and sine waveform to execute speaker's distortion test is one of the applications.
- * Coupling function arbitrarily sets ratio and difference for frequency and amplitude between two channels to realize a simultaneous effect for all parameters of dual channel. The example is amplifier using third order interpolation point(IP3) measurement to simulate signal output of two different frequency oscillators.

- * Tracking function produces differential signal with same frequency, same amplitude, and 180 degree phase difference.
- * Phase function arbitrarily sets phase parameters between two channels such as simulating sine/ cosine/square signal phase adjustment.

SPECIFICATIONS

| | | AFG-3031 | AFG-3032 | AFG-3021 | AFG-3022 |
|------------------------------------|--|--|--------------|-----------------------------|--------------|
| CHANNELS | | 1 | 2 | 1 | 2 |
| FEATURES | I/O Signal Ground for the Instrument Chassis | Connector shells for channel output(s), Sync output, 10MHz REF Input, Mod Input and Mod output are isolated from the instrument's chassis. Maximum allowable voltage on isolated connector shells is ±42 Vpk. (DC + AC Peak) | | | |
| | Each of the Signal Ground of CH1/CH2 | — | Isolated | — | Isolated |
| | Standard Waveforms | Sine, Square, Triangle, Ramp, Pulse, Noise, Harmonic | | | |
| ARBITRARY WAVEFORMS | Sample Rate | 250 MSa/s | | | |
| | Repetition Rate | 125MHz | | | |
| | Waveform Length | 8M points | | | |
| | Amplitude Resolution | 16 bits | | | |
| | Non-Volatile Memory | Ten 8M waveforms (1) | | | |
| | User define Output Section | Any section from 2 ~ 8M points | | | |
| | Trigger | Infinite/Manual/External | | | |
| | Built-in Arbitrary Waveforms | Sine, Square, Ramp, Sinc, Exp Rise, Exp Fall, DC, Pulse, Abstan, Havercosine, Sinever, Absin, Haversine, Stair_down, Absinehalf, N_pulse, Stair_UD, Ampalt, Negramp, Stair_up, Attalt, Rectpuls1, Stepres, Diric_even, Roundhalf, Trapezia, Diric_odd, Sawtoot, Tripuls1, Gauspuls1, Sinetra, Dlorentz, Ln, Sqrt, Since, Lorentz, Xsquare, Gauss, Arccos, Arctan, Sech, Arccot, Arctanh, Sinh, Arcsc, Cosh, Tan, Arcsec, Cot, Tanh, Arcsin, Csc, Arcsinh, Sec, Barthannwin, Chebwin, Kaiser, Bartlett, Flattopwin, Triang, Blackman, Hamming, Tukeywin, Bohmanwin, Hann, Cardiac, EOG, EEG, EMG, PLETH, RESP, ECG1, ECG2, ECG3, ECG4, ECG5, ECG6, ECG7, ECG8, ECG9, ECG10, ECG11, ECG12, ECG13, ECG14, ECG15, LFPULSE, TENS1, TENS2, TENS3, IGNITION, SP, VR, TP1, TP2A, TP2B, TP3A, TP3B, TP4, TP5A, TP5B <small>Note: It is required to update the ARB data first prior to enabling both Medical (Cardiac, EOG, EEG, EMG, PLETH, RESP, ECG1, ECG2, ECG3, ECG4, ECG5, ECG6, ECG7, ECG8, ECG9, ECG10, ECG11, ECG12, ECG13, ECG14, ECG15, LFPULSE, TENS1, TENS2, TENS3) and AutoElec (IGNITION, SP, VR, TP1, TP2A, TP2B, TP3A, TP3B, TP4, TP5A, TP5B) waveforms.</small> | | | |
| IQ WAVEFORMS | Source Type | Random, Fixed Pattern ASK, MSK, FSK, 2FSK, 4FSK, 8FSK, BPSK, QPSK, DQPSK, OQPSK, pi/4-QPSK, pi/4-DQPSK, 8PSK, 16APSK, 32APSK, 16QAM, 32QAM, 64QAM | | | |
| FREQUENCY CHARACTERISTICS | Sine / Square Pulse | 1µHz ~ 30MHz | 1µHz ~ 30MHz | 1µHz ~ 20MHz | 1µHz ~ 20MHz |
| | Triangle / Ramp | 1µHz ~ 25MHz | 1µHz ~ 25MHz | 1µHz ~ 20MHz | 1µHz ~ 20MHz |
| | Resolution | 1µHz ~ 1MHz | | | |
| | Accuracy | ±1 ppm 0 ~ 50°C ; ±0.3 ppm 18 ~ 28°C | | | |
| | Stability | ±1 ppm, per 1 year | | | |
| | Aging | ≤ 1 µHz | | | |
| | Tolerance | | | | |
| OUTPUT CHARACTERISTICS (2) | Amplitude | 1 mVpp ~ 10 Vpp (into 50Ω); 2 mVpp to 20 Vpp (into open-circuit) ± 1% of setting ±1 mVpp (at 1 kHz / into 50Ω without DC offset) | | | |
| | Range | 0.1 mV or 4 digits | | | |
| | Accuracy | 0.1dB <10 MHz; 0.2 dB 10 MHz ~ 30 MHz (sinewave relative to 1 kHz/into 50Ω) | | | |
| | Resolution | Vpp, Vrms, dBm, | | | |
| | Flatness | ±5 Vpk ac + dc (into 50Ω) ; ±10Vpk ac +dc (into open circuit) | | | |
| | Units | 1% of setting + 2 mV+ 0.5% of amplitude | | | |
| | Offset | 50Ω typical (fixed); > 10MΩ (output disabled) | | | |
| | Accuracy | Short-circuit protected ; Overload relay automatically disables main output | | | |
| | Impedance | 42Vpk max. | | | |
| | Waveform Output | TTL-compatible into>1kΩ | | | |
| | SYNC Output | 50Ω nominal | | | |
| | Protection | | | | |
| | Ground Isolation | | | | |
| | Level | | | | |
| | Impedance | | | | |
| SINE WAVE CHARACTERISTICS | Harmonic Distortion(5) | -60 dBc DC ~ 1 MHz, Ampl<3 Vpp; -55 dBc DC ~ 1 MHz Ampl>3 Vpp -45 dBc 1MHz ~ 5 MHz, Ampl>3 Vpp; -30 dBc 5MHz ~ 30 MHz, Ampl>3 Vpp | | | |
| | Total Harmonic Distortion | <0.2%+0.1mVrms; DC ~ 20 kHz | | | |
| | Spurious (non-harmonic)(5) | -60 dBc DC~1 MHz; -50 dBc 1MHz~20MHz; -50 dBc+ 6 dBc/octave 1MHz~30MHz(AFG-3031/3032only) | | | |
| | Phase Noise | <-110dBc/Hz typical, 15 kHz offset, fc = 10MHz | | | |
| SQUARE WAVE CHARACTERISTICS | Rise/Fall Time | <8 ns (3) | | | |
| | Overshoot | < 5% | | | |
| | Asymmetry(@50% duty) | 1% of period+1 ns | | | |
| | Variable Duty Cycle | 20.0%~80.0%, ≤ 25 MHz; 40.0%~60.0%, 25~30MHz | | 20.0%~80.0%, ≤ 20 MHz | |
| | Jitter | 0.01%+525ps<2 MHz; 0.1%+75ps>2 MHz | | | |
| RAMP CHARACTERISTICS | Linearity | < 0.1% of peak output | | | |
| | Variable Symmetry | 0% ~ 100% (0.1% resolution) | | | |
| PULSE CHARACTERISTICS | Pulse Width | 20ns ~ 999.830s(Extended mode 0.00ns~1.000ks ^{ns}); Width-0.625 x [(Rise Time-0.6ns)+(Fall Time-0.6ns)] ≥ 0 ; Period ≥ Width-0.625 x [(Rise Time-0.6ns)+(Fall Time-0.6ns)] | | | |
| | Duty Setting Range | 0.017% ~ 99.983%(Extended mode 0.0000%~100,0000% ^{ns}) | | | |
| | Period | 40ns ~ 1,000,000s | | | |
| | Rise Time and Fall Time ^{ns} | 9.32ns ~ 799.89ks | | | |
| | Resolution | 0.0001% | | | |
| | Overshoot | <5% | | | |
| | Jitter | 100 ppm + 50 ps | | | |
| NOISE | Noise Type | Gaussian | | | |
| | Noise Bandwidth | 100MHz equivalent bandwidth | | | |
| HARMONIC | Harmonic Order | ≤ 8 | | | |
| | Harmonic Type | Even, Odd, All, User ; Amplitude and Phase can be set for all harmonics | | | |
| AM and AM(DSB-SC) | Carrier Waveforms | Sine, Square, Triangle, Ramp, Pulse, Arb | | | |
| | Modulating Waveforms | Sine, Square, Triangle, Up/Dn Ramp | | | |
| | Modulating Frequency | 2 mHz ~ 20 kHz | | | |
| | Depth | 0% ~ 120.0% | | | |
| | Source | Internal / External | | | |
| FM | Carrier Waveforms | Sine, Square, Triangle, Ramp | | | |
| | Modulating Waveforms | Sine, Square, Triangle, Up/Dn Ramp | | | |
| | Modulating Frequency | 2 mHz ~ 20 kHz | | | |
| | Peak Deviation | DC ~ 30 MHz (1µHz resolution) | | DC~20 MHz (1µHz resolution) | |
| | Source | Internal / External | | | |
| PM | Carrier Waveforms | Sine, Triangle, Ramp | | | |
| | Modulating Waveforms | Sine, Square, Triangle, Up/Dn Ramp | | | |
| | Phase Deviation | 0° ~ 360°, 0.1° resolution | | | |
| | Modulating Frequency | 2 mHz ~ 20 kHz | | | |
| | Source | Internal | | | |
| PWM | Carrier Waveforms | Square | | | |
| | Modulating Waveforms | Sine, Square, Triangle, Up/Dn Ramp | | | |
| | Modulating Frequency | 2 mHz ~ 20 kHz | | | |
| | Deviation | 0% ~ 100.0% of pulse width, 0.1% resolution | | | |
| | Source | Internal / External | | | |
| PSK | Carrier Waveforms | Sine, Square, Triangle, Ramp | | | |
| | Modulating Waveforms | 50% duty cycle square | | | |
| | Internal Rate | 2 mHz to 1 MHz | | | |

SPECIFICATIONS

| | | AFG-3031 | AFG-3032 | AFG-3021 | AFG-3022 |
|---------------------------|-----------------------------------|---|--------------------|----------------|----------------|
| | Frequency Range | DC ~ 30 MHz | | DC ~ 20 MHz | |
| | Source | Internal / External | | | |
| ADDITIVE MODULATION (SUM) | Carrier Waveforms | Sine, Triangle, Ramp, Pulse, Noise | | | |
| | Modulating Waveforms | Sine, Square, Triangle, Up/Dn Ramp | | | |
| | Ratio | 0% ~ 100% of carrier amplitude, 0.01% resolution | | | |
| FSK | Modulating Frequency | 2 mHz ~ 20 kHz | | | |
| | Source | Internal / External | | | |
| | Internal Rate | 50% duty cycle square 2 mHz ~ 1 MHz | | | |
| | Frequency Range | DC ~ 30 MHz | | DC ~ 20 MHz | |
| | Source | Internal / External | | | |
| SWEEP | Waveforms | Frequency Sweep : Sine, Square, Triangle, Ramp; Amplitude Sweep : Sine, Square, Triangle, Ramp, Pulse, Noise, ARB | | | |
| | Type | Frequency, Amplitude | | | |
| | Functions | Linear or Logarithmic | | | |
| | Direction | Up or Down | | | |
| | Start/Stop Frequency | Any frequency within the waveform's range | | | |
| | Sweep Time | 1 ms ~ 500 s (1 ms resolution) | | | |
| | Trigger Mode | Single, External, Internal | | | |
| | Trigger Source | Internal / External | | | |
| BURST | Waveforms | Sine, Square, Triangle, Ramp, Pulse, Noise | | | |
| | Frequency | 1 μHz ~ 30 MHz (4) | 1 μHz ~ 30 MHz (4) | 1 μHz ~ 20 MHz | 1 μHz ~ 20 MHz |
| | Burst Count | 1 ~ 1,000,000 cycles or Infinite | | | |
| | Start / Stop Phase | -360.0 ~ +360.0 (0.1° resolution) | | | |
| | Internal Period | 1 μs ~ 500 s | | | |
| | Gate Source | External Trigger (pulse waveforms can only be used in gate mode) | | | |
| | Trigger Source | Single, External or Internal Rate | | | |
| | Trigger Delay | N-Cycle, Infinite : 0 μs ~ 100s (1us resolution) | | | |
| EXTERNAL MODULATION INPUT | Type | AM, AM (DSB-SC), FM, PWM, Sum | | | |
| | Voltage Range | ± 5V full scale | | | |
| | Input Impedance | 10kΩ | | | |
| | Frequency | DC ~ 20 kHz | | | |
| | Modulation Output | Yes | — | Yes | — |
| | Type | AM, AM (DSB-SC), FM, PM, PWM, Sum, Sweep | | | |
| | Amplitude Range | ≥ 1Vpp | | | |
| | Impedance | > 10kΩ typical | | | |
| EXTERNAL TRIGGER INPUT | Type | For FSK, Burst, Sweep, N Cycle ARB | | | |
| | Input Level | TTL Compatibility | | | |
| | Slope | Rising or Falling (Selectable) | | | |
| | Pulse Width | > 100 ns | | | |
| | Input rate | DC ~ 1 MHz | | | |
| | Input Impedance | 10kΩ, DC coupled | | | |
| LATENCY | Sweep | < 1 μs (typical); Burst : < 0.55 ns (typical); ARB : < (27.5/sample rate)+274ns | | | |
| JITTER | Sweep | 2.5 μs ; Burst : 1 ns , except pulse, 300 ps | | | |
| 10MHz REFERENCE OUTPUT | Output Voltage | 1 Vp-p / 50 Ω square wave | | | |
| | Output Impedance | 50 Ω, AC coupled | | | |
| | Output Frequency | 10MHz | | | |
| 10MHz REFERENCE INPUT | Input Voltage | 0.5Vpp ~ 5Vpp | | | |
| | Input Impedance | 1k Ω, unbalanced , AC coupled | | | |
| | Input Frequency | 10MHz ± 10Hz | | | |
| | Waveform | Sine or Square (50±5% duty) | | | |
| | Ground Isolation | 42Vpk max. | | | |
| EXTERNAL-SYNC | Phase Delay (max.) | Series Connection : 39+(N-2) x 39 ±25nS; Parallel connection : (N-1) x 6 ±25nS (where N=number of connected units) Series Connection : 4 ; Parallel Connection : 6 | | | |
| | Maximum Number of Connected Units | Series Connection : 4 ; Parallel Connection : 6 | | | |
| | Applicable Functions | Sine, Square, Triangle, Pulse, Ramp, Harmonic, MOD, Sweep, Burst | | | |
| | Store/Recall | 10 Groups of Setting Memories | | | |
| | Interface | GPIB(Optional), LAN, USB | | | |
| | Display | 4.3 inch TFT LCD, 480 x 3 (RGB) x 272 | | | |
| GENERAL SPECIFICATIONS | Power Source | AC100 ~ 240V , 50 ~ 60Hz | | | |
| | Power Consumption | 50VA | 85VA | 50VA | 85VA |
| | Operating Environment | Temperature to satisfy the specification : 18 ~ 28 °C; Operating temperature : 0 ~ 40 °C; Relative Humidity : ≤ 80%, 0 ~ 40°C ; ≤ 70%, 35 ~ 40°C ; Installation category : CAT II | | | |
| | Operating Altitude | 2000 meters | | | |
| | Pollution Degree | IEC 61010 Degree 2, Indoor Use | | | |
| | Storage Temperature | -10 ~ 70 °C, Humidity: ≤ 70% | | | |
| | Dimensions & Weight | 265 (W) x 107 (H) x 374 (D)mm, Approx. 4kg | | | |



Cosinus Messtechnik GmbH * Rotwandweg 4 * D-82024 Taufkirchen
 Tel.: 089-665594-0 * Fax: 089-665594-30 * Web: www.cosinus.de * eMail: office@cosinus.de