

MODEL 2031


2031	
AC A	20A ±2%rdg±5dgt[50Hz - 1kHz] 200A ±2%rdg±5dgt[50/60Hz] ±3%rdg±10dgt[40Hz - 1kHz]
Conductor size	φ24mm max.
Frequency response	40Hz - 1kHz
Applicable Standards	IEC 61010-1 CAT III 300V
Power source	LR44(1.5V) × 2 *Continuous measuring time : Approx. 100 hours (Auto power off : Approx. 10 minutes)
Dimension	147(L) × 58.5(W) × 26(D)mm
Weight	Approx. 100g
Accessories	9090 (Carrying case) LR44 × 2 Instruction manual



Ø24 MAX 200A AC A DATA HOLD AUTO POWER OFF

- Can measure large AC current up to 200A
- 24mm tear drop shaped jaws
- Minimum resolution 0.01A

CE

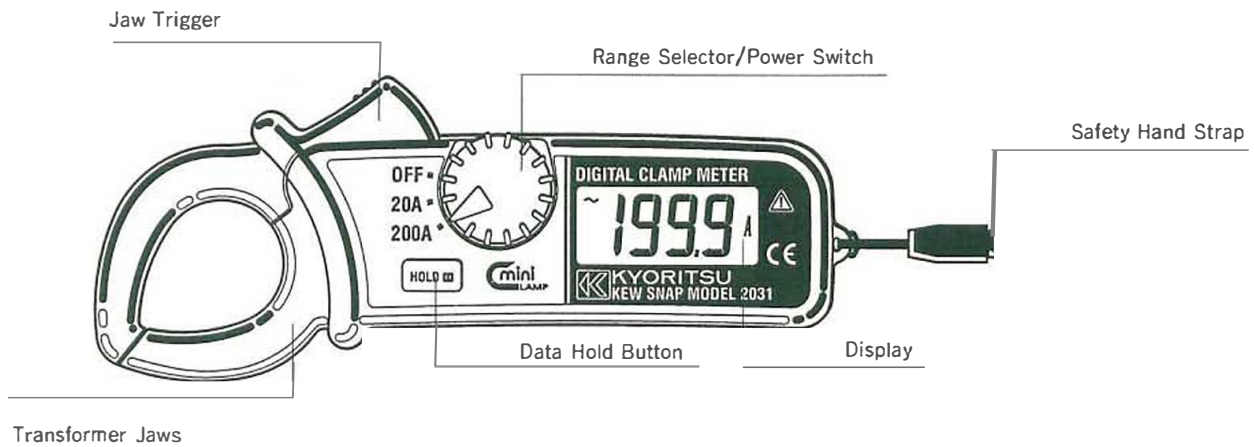

**COSINUS Messtechnik - Ihr Partner für Messlösung
in allen elektrischen und physikalischen Anwendungen**

COSINUS Messtechnik GmbH

Rotwandweg 4

82024 Taufkirchen

Tel.: 089 / 66 55 94 - 0

Fax: 089 / 66 55 94 -30

office@cosinus.de
www.cosinus.de